The Vito

Specification Sheet

April 2005

Mercedes-Benz

Vito Panel Vans

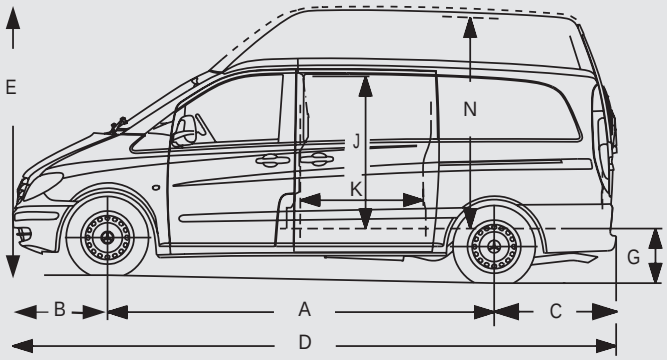

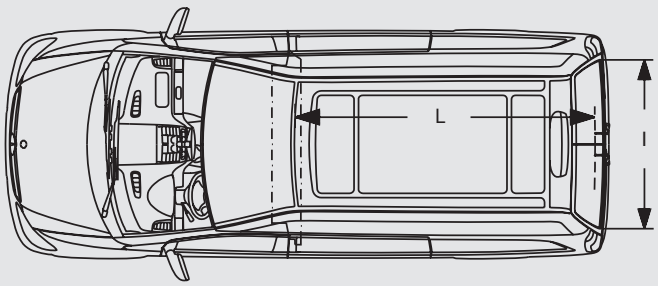

Interior

These interior features are common to all models unless otherwise stated

Trim	Cab headlining Driver and passenger grab handle Moulded ergonomic facia Padded steering wheel Power-assisted steering with electrical steering lock
Seating	Driver's 3-way adjustable seat with head restraint Three-point inertia reel seat belts to all seats (height adjustable on front outer seats)
Refinements	Ashtray with cigarette lighter in dashboard Cab interior lighting Ceiling light in the load compartment (with switch in the dashboard) Central locking with remote control Cup holder Driver's airbag with emergency fuel cut off Electric front windows Radio/CD player with two speakers Steering wheel height and reach adjustable
Controls	Central locking switch in dashboard Hazard warning lights Headlamp levelling switch Headlamp rotary switch Heater and demister with multiple outlets Horn in centre of steering wheel Key start with steering lock and transponder engine immobiliser (FBS3) Left-hand stalk for indicators, wipers, main beam, headlamp flasher
Instruments	ASSYST – flexible servicing system Coolant temperature gauge Digital odometer with trip counter Digital quartz clock Fuel gauge Rev counter Speedometer
Warning lights	ABS/ESP/ASR/EBV warning lights Brake pad wear Coolant temperature Engine pre-heater Lamp failure Low brake fluid Low coolant level Low engine oil Malfunction in the restraint system Open door Parking brake Rear fog lamp
Visibility	'Butterfly' wipers Laminated windscreen Two sun visors, swivelling to the side, driver's side with map pocket
Stowage	Illuminated glovebox Lashing rings in load compartment Storage compartments in dashboard Storage within driver's and passenger doors, also extra storage under the dual passenger seat Tool kit and storage area under driver's seat
Access	Top hinged tailgate or twin side hinged rear doors opening to 180° Twin sliding side load doors

PLEASE SEE INDIVIDUAL VEHICLE PAGES FOR SPECIFIC INFORMATION

Additional interior features

		Panel Van	Dualiner Basic	Dualiner Comfort	Traveliner
Trim	Floor and ceiling lining throughout	–	–	●	●
	Full trim in rear	–	–	●	●
	Half-board trim in rear	○	○	–	–
	Rear grab handles	–	–	●	●
	Wooden floor	●	●	–	–
Seating	Dual front passenger seat with head adjustments	●	●	●	○
	Single front passenger seat with head adjustment	○	○	○	●
	6 seats in rear (quick release) with three-point interia reel seat belts	–	–	–	●
	3 seats in rear (quick release) with three-point interia reel seat belts	–	●	●	–
Refinements	Additional speakers in rear	–	–	●	●
	Comfort opening and closing	○	○	○	●
	Heated exterior mirrors, electrically adjustable	○	○	○	●
	Heating/cooling air channel to passenger compartment	○	●	●	●
	Interior lighting in middle of rear passenger area	–	–	●	●
	Passenger airbag	○	○	○	●
Warning lights	Low windscreen washer fluid level	○	○	○	●
Visibility	Interior rearview mirror	○	○	○	●
	Tinted windows all round	○	○	○	●
Stowage	12-volt plug in rear	○	○	●	●
Access	Children's safety lock in rear side doors	○	●	●	●

Key
● Standard ○ Option – Not available

Exterior

These exterior features are common to all models unless otherwise stated

Wheels and tyres	
Wheels – Van	6J x 16
– Dualiner and Traveliner	6.5J x 16
Spare wheel	Mounted on carrier under rear of body (except Compact: Spare wheel mounted in the load space)*
Tyres – Van	195/65R 16
– Dualiner and Traveliner	205/65R 16
Brakes	
Front/Rear	Floating caliper discs, internally ventilated in front, with pad wear indicator front and rear
Service	Dual-circuit hydraulic system ESP & BAS including ABS, ASR and EBV
Parking	Foot-operated parking brake
Suspension	
Front axle	Fully independent McPherson struts with coil springs, shock absorbers and stabiliser
Rear axle	Semitrailing-arm axle with coil springs and shock absorbers

Steering	
Type	Power-assisted rack and pinion
Turning circle:	
Compact and Long	Wall to wall: 11.8m Kerb to kerb: 11.0m
Extra long	Wall to wall: 12.5m Kerb to kerb: 11.7m
Fuel tank	75-litre plastic tank
Capacity	Filler on left 'B' pillar (secured behind hinged panel)
Electrical System	
Voltage	12 volt
Battery	74 Ah
Alternator	14 volt/200 amp
Road lights	Halogen headlamps Headlamp levelling Front halogen fog lamps Indicator side repeators 3rd brake light Tail lights (reverse, fog lights integrated in cluster)
Fuse box	Sited in the engine bay

** Dualiner Comfort Compact is fitted with TIREFIT to replace a spare wheel.*

Glossary

ABS	– Anti-lock braking system. ABS regulates the brake pressure to ensure that the wheels do not lock when you apply the brakes.
ASR	– Acceleration Skid Control. ASR works in the same way as ABS in that it detects and avoids wheel slip. The only difference is that it detects slip when the wheel is driving rather than braking and that instead of reducing the braking as in ABS, ASR reduces the engine torque.
BAS	– Brake Assist. BAS helps to reduce the stopping distance for emergency braking.
EBV	– Electronic Brake-power Distribution. EBV prevents the vehicle from overbraking the rear wheels when the rear-axle load is only light or when the friction between the road surface is very low (e.g. on a wet road surface).
ESP	– Electronic Stability Program. ESP and ASR stabilises the vehicle by braking individual wheels and limiting the engine power output.
GVW	– Gross Vehicle Weight. The maximum allowable weight of a laden vehicle.
GTW	– Gross Train Weight. The maximum allowable weight of a laden vehicle and trailer combination. Shown for both ‘unbraked’ and ‘braked’ trailers in the specification pages.
Traveliner	– Fully furnished passenger carrying vehicle with the model number denoting the number of seats (including driver).
Wheelbase	– The dimensions from centre of front wheel to centre of rear wheel.

Please refer to the latest edition of the Mercedes-Benz Vito, Sprinter and Vario Recommended Retail Price lists for availability and prices of optional equipment. The right is reserved to alter specification or equipment without notice. All specifications refer to UK-sourced products only. All weights and dimensions quoted are approximate and subject to normal manufacturing tolerances of ±5%.

The illustrations may show accessories and items of optional equipment which are not part of the standard specification. Colours may differ slightly from those shown, owing to the limitations of the printing process. For more information please contact your Mercedes-Benz van dealer or visit our website:

www.mbvans.co.uk

CV413/0405

Issued by: DaimlerChrysler UK Ltd, Tongwell, Milton Keynes MK15 8BA
Tel. 01908 245000